

Advantages of the 360

- less pre-drilling
- less splitting
- less effort
- faster




Authorised Distributor

Size Range

DIAM	LENGTH	QUANTITIES			THREAD LENGTH	SHANK RIBS
		INNER	CARTON	PALLET		
3.5mm	15	200	20000	540000	FULL	NO
	20	200	20000	540000	FULL	NO
	25	200	12000	324000	FULL	NO
	30	200	10000	270000	PART	YES
	35	200	10000	270000	PART	YES
	40	200	8400	226800	PART	YES
	50	200	5000	135000	PART	YES
4.0mm	16	200	20000	540000	FULL	NO
	20	200	12000	324000	FULL	NO
	25	200	10000	270000	FULL	NO
	30	200	10000	270000	PART	YES
	35	200	5000	135000	PART	YES
	40	200	5000	135000	PART	YES
	45	200	5000	135000	PART	YES
	50	200	5000	135000	PART	YES
	60	200	4000	108000	PART	YES
	70	100	2500	67500	PART	YES
4.5mm	30	200	5000	135000	PART	YES
	40	200	5000	135000	PART	YES
	50	200	5000	135000	PART	YES
	60	100	2500	67500	PART	YES
	70	100	2500	67500	PART	YES
	80	100	2500	67500	PART	YES
5.0mm	30	200	5000	135000	PART	YES
	40	200	5000	135000	PART	YES
	50	200	4000	108000	PART	YES
	60	100	2500	67500	PART	YES
	70	100	2500	67500	PART	YES
	80	100	2500	67500	PART	YES
	90	100	2500	67500	PART	YES
	100	100	2500	67500	PART	YES
	120	100	2500	67500	PART	YES
6.0mm	50	100	2500	67500	PART	YES
	60	100	2500	67500	PART	YES
	70	100	2500	67500	PART	YES
	80	100	2000	54000	PART	YES
	90	100	2000	54000	PART	YES
	100	100	2000	54000	PART	YES
	130	100	1000	27000	PART	YES
	150	100	1000	27000	PART	YES
	200	50	500	13500	PART	YES

timberfix 360

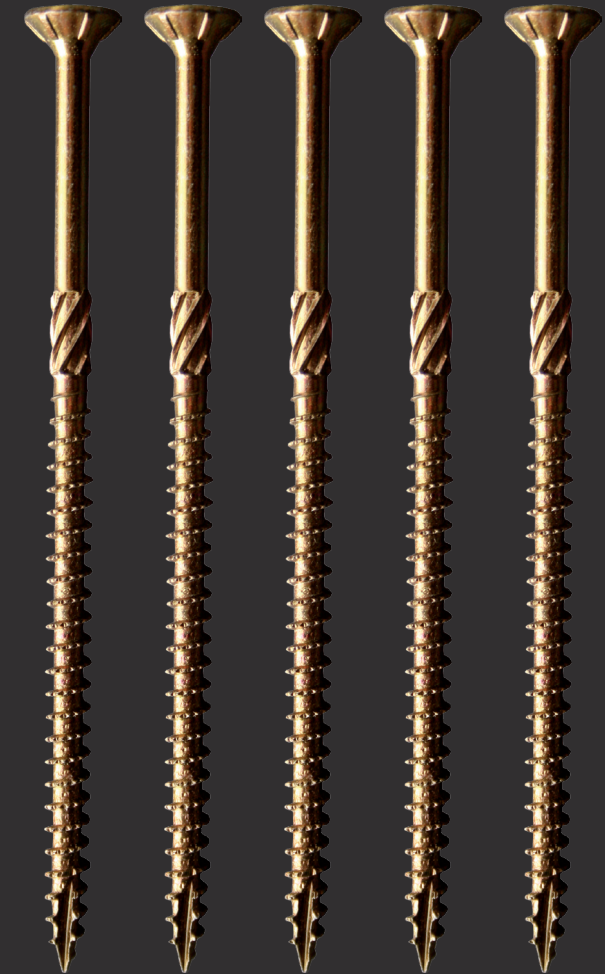

Introducing the all new high performance multi purpose wood screw. The timberfix[®] 360 drives faster with less torque and a reduced chance of splitting the wood.

the 'all-round' performer

Application

Timberfix® 360 - One of the most versatile screws on the market today, suitable for both manmade boards and natural wood. Capable of driving into most hardwoods without the need for pre drilling.

Suitable materials :



Hard Wood

Chipboard


Oak

Plywood

Soft Wood

OSB

MDF Board

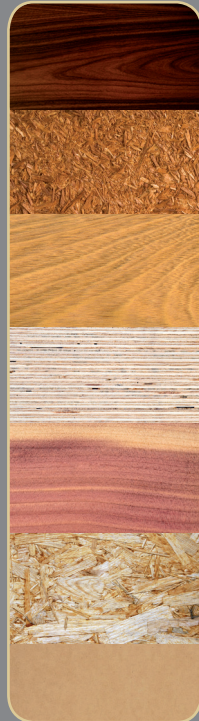

Features

Countersunk head

Reinforced countersunk head handles torque and harder woods. Self countersinking ribs under the head are time saving and ensure a neat finish. Classic pozi drive.

Shank ribs

These reduce the drive torque required during installation. Helps prevent the wood splitting, particularly useful on the longer lengths and larger diameters. Cleans the hole when securing two pieces of wood together preventing jacking.

Special thread geometry

The special thread design with advanced cutting edge combined with a next generation lubrication system ensures almost half the torque is required to drive in. Faster, with less effort. Zinc and yellow finish.

Cut point

The type 17 or "gash" point, helps drive the screw through the tougher woods without pre-drilling.

timberfix 360

